

PERC Technology

DuDrive Series TSHM-120HL



Trunsun High Efficiency Monocrystalline Half-cut Cell
Solar Module with Perc Technology (1500V)

325-335W



Higher Module Efficiency

Brings 5-10W power gain due to half-cut production system



More Energy Yield

Lower NMOT and better temperature coefficient by lower cell series resistance, helps boost energy yield



Lower Operating Temperature, More Reliable

Lower operating temperature and hot spot temperature during the sunny day, making the module prevail during the sunny days



Better Shading Tolerance

Thanks to Paralleling circuit design, more power generated under shading condition and during morning & evening time




Better Micro Crack Resistance

Minimize the impact by micro crack by limiting cell damage and potentially extending area by half-cut module architecture




1500V System Voltage

Approved IEC1500Vdc system voltage, saving on BoS cost

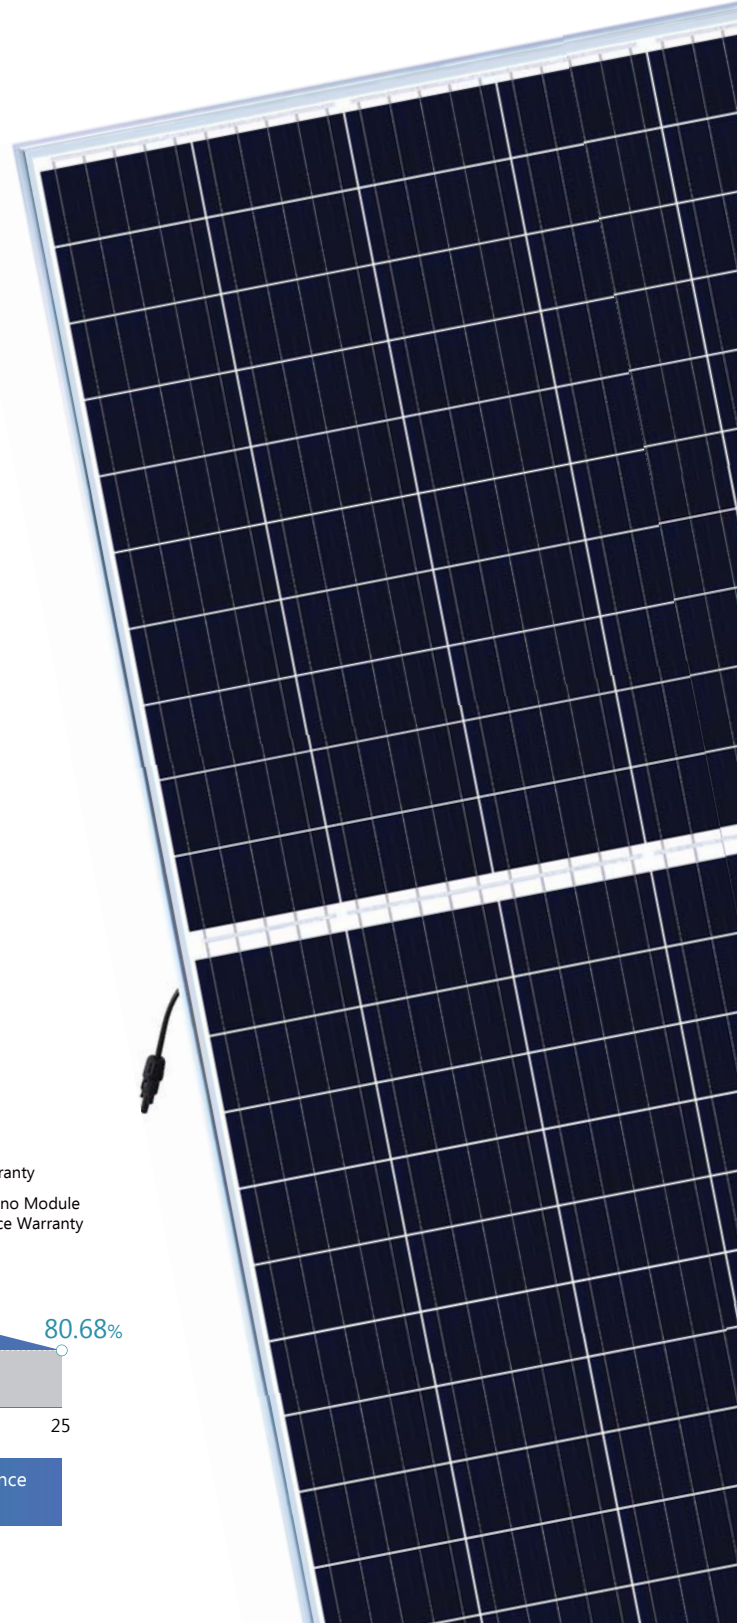

LINEAR PERFORMANCE WARRANTY

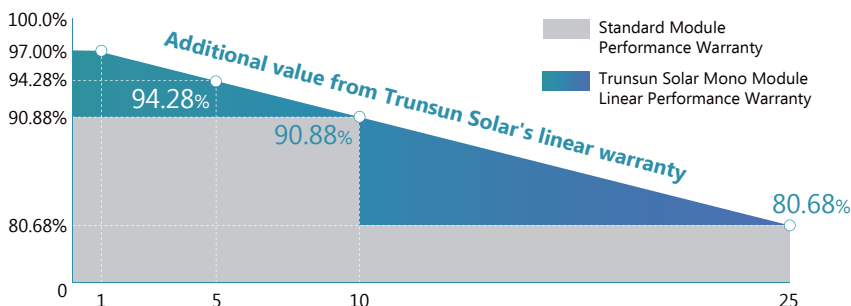

12years Product Material & Workmanship

25years Linear Performance Warranty

About Trunsun Solar

Trunsun Solar, established in 2008, is dedicated to providing solar products with high quality, excellent performance and strong after-sales support. The company not only has strong financial support but also never stops innovating. Trunsun Solar will keep delivering the diversified solar products for all kinds of renewable energy generation systems around the world.

DuDrive Series TSHM-120HL

Trunson High Efficiency Monocrystalline Half-cut Cell Solar Module with Perc Technonoly (1500V)

| ELECTRICAL DATA @ STC* | | TSHM325-120HL | TSHM330-120HL | TSHM335-120HL |
|-----------------------------|-----|---------------|---------------|---------------|
| Peak Power (Pmax) | (W) | 325 | 330 | 335 |
| Maximum Power Voltage (Vmp) | (V) | 34.36 | 34.63 | 34.90 |
| Maximum Power Current (Imp) | (A) | 9.46 | 9.53 | 9.60 |
| Open-circuit Voltage (Voc) | (V) | 41.26 | 41.53 | 41.78 |
| Short-circuit Current (Isc) | (A) | 9.99 | 10.08 | 10.16 |
| Module Efficiency | (%) | 19.28 | 19.57 | 19.87 |
| Operating Temperature | | -40°C~+85°C | | |
| Maximum System Voltage | | 1500V | | |
| Maximum Series Fuse Rating | | 15A | | |
| Application Class | | Class A | | |
| Power Tolerance | | 0~+3% | | |

*STC (Standard Test Condition): Irradiance 1000W/ m², Module Temperature 25°C, AM 1.5

| ELECTRICAL DATA @ NMOT* | | TSHM325-120HL | TSHM330-120HL | TSHM335-120HL |
|-----------------------------|-----|---------------|---------------|---------------|
| Peak Power (Pmax) | (W) | 242 | 246 | 250 |
| MPP Voltage (Vmp) | (V) | 31.99 | 32.24 | 32.49 |
| MPP Current (Imp) | (A) | 7.58 | 7.58 | 7.69 |
| Open Circuit Voltage (Voc) | (V) | 39.09 | 39.34 | 39.58 |
| Short Circuit Current (Isc) | (A) | 8.06 | 8.13 | 8.20 |

*Under Nominal Module Operating Temperature (NMOT), Irradiance of 800W/ m², Spectrum AM 1.5, Ambient Temperature 20°C, Wind Speed 1m/s


| TEMPERATURE CHARACTERISTICS | |
|---------------------------------|-----------|
| Temperature coefficient of Pmax | -0.38%/°C |
| Temperature coefficient of Voc | -0.31%/°C |
| Temperature coefficient of Isc | 0.05%/°C |
| NMOT | 41±3°C |

| MECHANICAL DATA | |
|-------------------|----------------------------------|
| Cell Type | Mono-Crystalline, 158.75×79.38mm |
| Cell Arrangement | 120pcs (2×(6×10)) |
| Dimension (L×W×H) | 1686×1000×35mm |
| Weight | 19.5kg |
| Front Cover | 3.2mm Tempered Glass |
| Frame | Anodized Aluminium Alloy |
| Junction Box | IP68, 3 Bypass Diodes |
| Cable Type | 4mm ² |
| Length of Cable | 1160mm |
| Connector | PV Connector |



| PACKING MANNER | |
|------------------|------|
| Packing Type | 40HQ |
| Piece/Pallet | 30 |
| Pallet/Container | 26 |
| Piece/Container | 780 |

*The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, Zhejiang Trunson Solar Co., Ltd. Reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.

Current-Voltage Curve under different irradiance

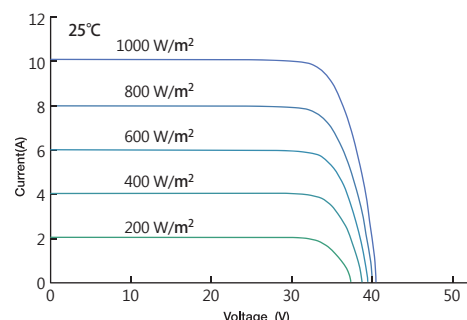

Current-Voltage Curve under different working temperatures

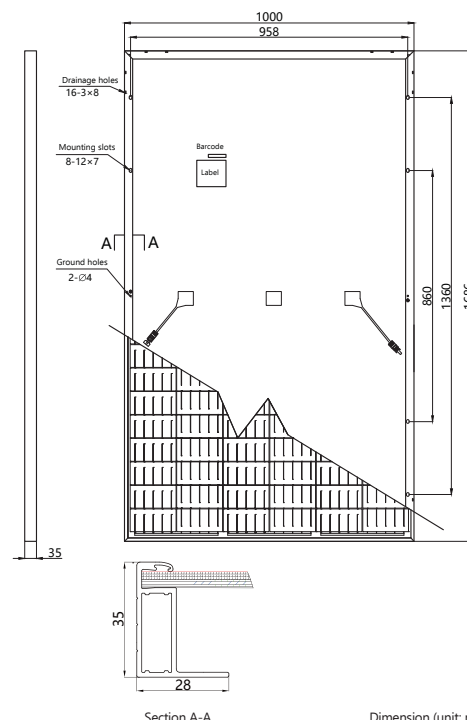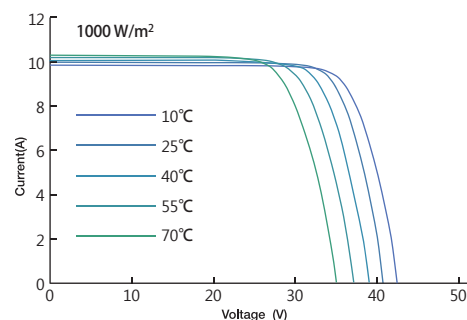

*Power measurement tolerance: ±3%

Version 2019.06 © Zhejiang Trunson Solar Co., Ltd All Rights Reserved.