

Standard Series TSP-60H



Trunsun High Efficiency Polycrystalline Solar Module (1500V)
275-290W



Approved Technology

Approved practice for different operating conditions



Positive Tolerance

Positive tolerance brings more power for free



Mechanical Load Endurance

Excellent mechanical load resistance: wind loads (2400Pa) & snow loads (5400Pa)



Guaranteed Reliability Against Harsh Environment

Due to Complicated Quality control system, offer survival solar module in harsh environment




1500V System Voltage

Approved IEC1500Vdc system voltage, saving on BoS cost



LINEAR PERFORMANCE WARRANTY

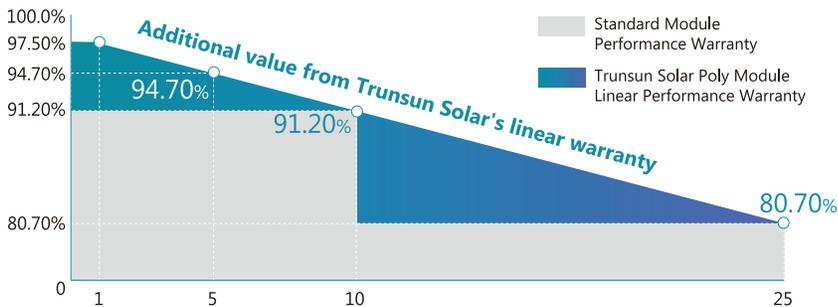

12years Product Material & Workmanship

25years Linear Performance Warranty

About Trunsun Solar

Trunsun Solar, established in 2008, is dedicated to providing solar products with high quality, excellent performance and strong after-sales support. The company not only has strong financial support but also never stops innovating. Trunsun Solar will keep delivering the diversified solar products for all kinds of renewable energy generation systems around the world.

Standard Series TSP-60H

Trunsun High Efficiency Polycrystalline Solar Module (1500V)

ELECTRICAL DATA @ STC*		TSP275-60H	TSP280-60H	TSP285-60H	TSP290-60H
Peak Power (Pmax)	(W)	275	280	285	290
Maximum Power Voltage (Vmp)	(V)	31.87	32.15	32.43	32.7
Maximum Power Current (Imp)	(A)	8.63	8.71	8.79	8.87
Open-circuit Voltage (Voc)	(V)	38.14	38.42	38.69	38.98
Short-circuit Current (Isc)	(A)	9.2	9.27	9.35	9.42
Module Efficiency	(%)	16.9	17.2	17.5	17.8
Operating Temperature		-40°C~+85°C			
Maximum System Voltage		1500V			
Maximum Series Fuse Rating		15A			
Application Class		Class A			
Power Tolerance		±3%			

*STC (Standard Test Condition): Irradiance 1000W/ m², Module Temperature 25°C, AM 1.5

ELECTRICAL DATA @ NMOT*		TSP275-60H	TSP280-60H	TSP285-60H	TSP290-60H
Peak Power (Pmax)	(W)	204	207	211	215
MPP Voltage (Vmp)	(V)	29.42	29.68	29.93	30.18
MPP Current (Imp)	(A)	6.93	6.99	7.05	7.12
Open Circuit Voltage (Voc)	(V)	35.83	36.09	36.35	36.62
Short Circuit Current (Isc)	(A)	7.45	7.51	7.57	7.63

*Under Nominal Module Operating Temperature (NMOT), Irradiance of 800W/ m², Spectrum AM 1.5, Ambient Temperature 20°C, Wind Speed 1m/s

TEMPERATURE CHARACTERISTICS

Temperature coefficient of Pmax	-0.41%
Temperature coefficient of Voc	-0.33%
Temperature coefficient of Isc	0.05%
NMOT	43±3°C

MECHANICAL DATA


Cell Type	Poly-Crystalline, 6" inch
Cell Arrangement	60pcs (6×10)
Dimension (L×W×H)	1640×991×35mm
Weight	18.2kg
Front Cover	3.2mm Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP67, 3 Bypass Diodes
Cable Type	4mm ²
Length of Cable	1000mm
Connector	Jiaming:PV-JM601A, Renhe:05-8

PACKING MANNER



Packing Type	40HQ
Piece/Pallet	30
Pallet/Container	28
Piece/Container	840

*The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, Zhejiang Trunsun Solar Co., Ltd. Reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.

Current-Voltage Curve under different irradiance

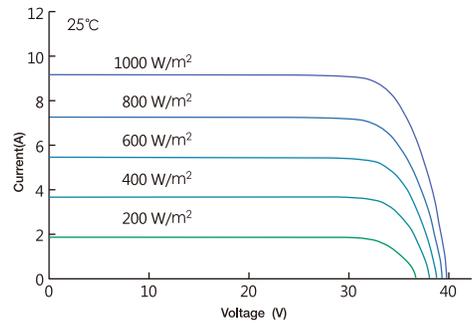

Current-Voltage Curve under different working temperatures

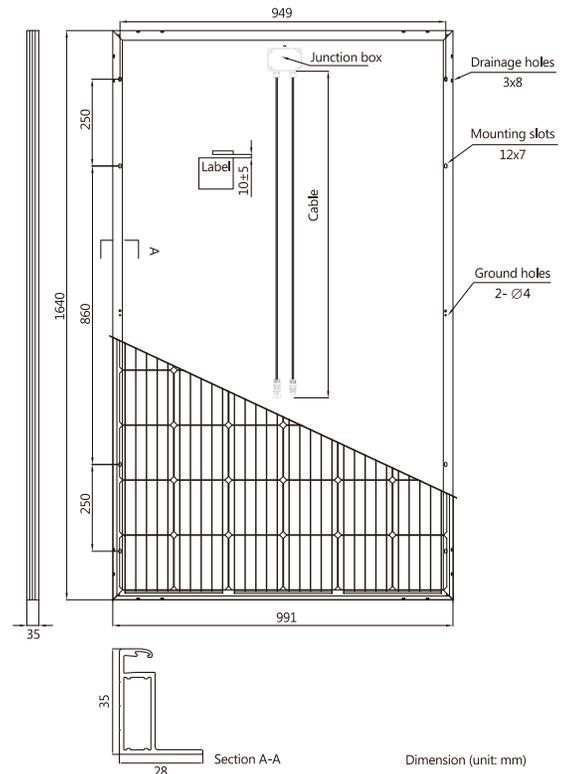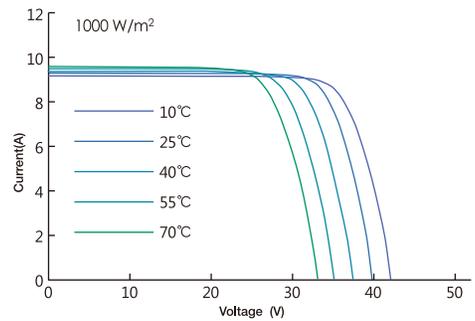

Version 2018.12 © Zhejiang Trunsun Solar Co., Ltd All Rights Reserved.

Headquarters # 800, Zhenbei Road, Zhili Town, Wuxing District, Huzhou, 313000, Zhejiang Province, CHINA

Marketing Center Room 0306, #3 SOHO Building, #968 Jinzhong Road, Changning District, 200335, Shanghai, CHINA

Overseas Factory Lot IV.1 & IV.4.2 Thuan Thanh Industrial Zone 3, Thanh Khoung Commune, Thuan Thanh District, Bac Ninh Province, Vietnam

Zhejiang Trunsun Solar Co., Ltd
<sales@trunsunsolar.com>